


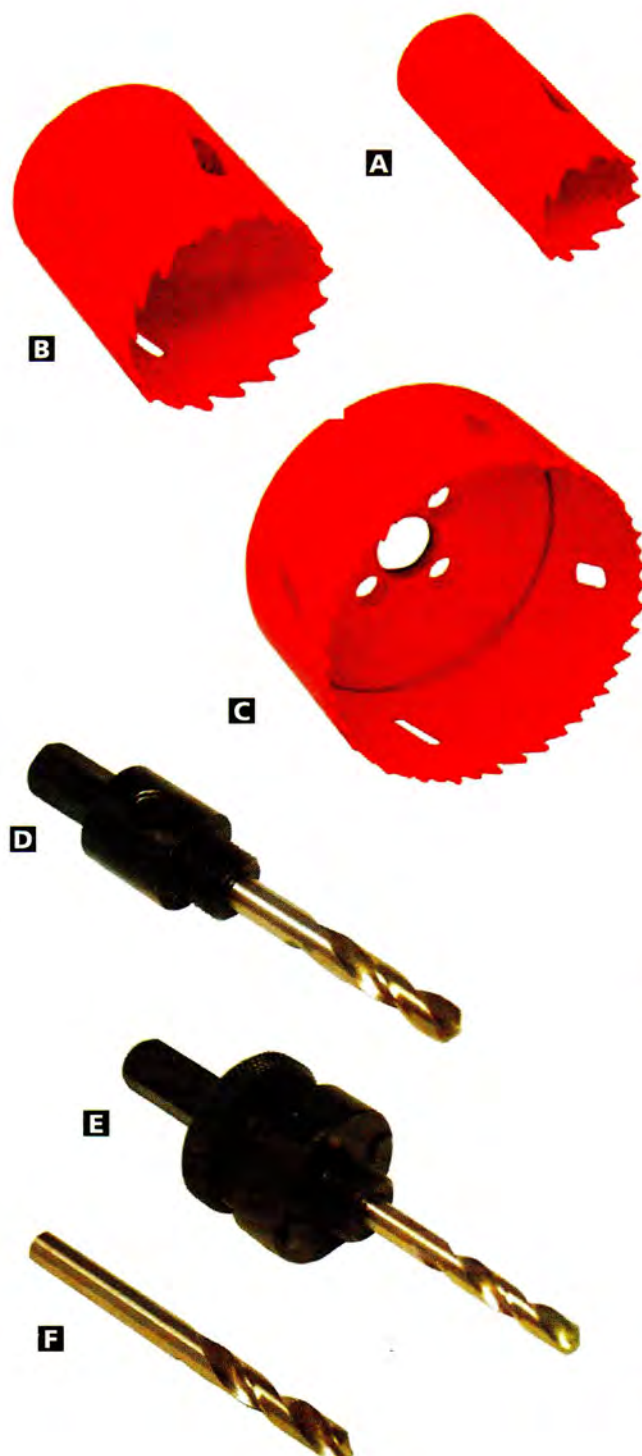

BI-METAL HOLESAWS

These hole saws are manufactured from bi-metal material with hardened teeth made from high speed steel, and a variable tooth pitch for fast smooth cutting. Bi-metal saws offer increased safety as they will not shatter under load. They are ideal for use on a wide variety of materials including wood, chipboard, plywoods, plasterboard, non-laminated plastics, and non-ferrous metals. This range is suitable for use in most variable speed power drills.

ART NO.	DESCRIPTION	DIAMETER
10.7.4.7.14	BI-METAL HOLESAW	14mm
10.7.4.7.16	BI-METAL HOLESAW	16mm
10.7.4.7.17	BI-METAL HOLESAW	17mm
10.7.4.7.19	BI-METAL HOLESAW	19mm
10.7.4.7.20	BI-METAL HOLESAW	20mm
10.7.4.7.21	BI-METAL HOLESAW	21mm
A 10.7.4.7.22	BI-METAL HOLESAW	22mm
10.7.4.7.24	BI-METAL HOLESAW	24mm
10.7.4.7.25	BI-METAL HOLESAW	25mm
10.7.4.7.27	BI-METAL HOLESAW	27mm
10.7.4.7.29	BI-METAL HOLESAW	29mm
10.7.4.7.30	BI-METAL HOLESAW	30mm
10.7.4.7.32	BI-METAL HOLESAW	32mm
10.7.4.7.35	BI-METAL HOLESAW	35mm
B 10.7.4.7.38	BI-METAL HOLESAW	38mm
10.7.4.7.40	BI-METAL HOLESAW	40mm
10.7.4.7.44	BI-METAL HOLESAW	44mm
10.7.4.7.48	BI-METAL HOLESAW	48mm
10.7.4.7.51	BI-METAL HOLESAW	51mm
10.7.4.7.54	BI-METAL HOLESAW	54mm
10.7.4.7.57	BI-METAL HOLESAW	57mm
10.7.4.7.60	BI-METAL HOLESAW	60mm
10.7.4.7.64	BI-METAL HOLESAW	64mm
10.7.4.7.65	BI-METAL HOLESAW	65mm
10.7.4.7.67	BI-METAL HOLESAW	67mm
10.7.4.7.70	BI-METAL HOLESAW	70mm
10.7.4.7.73	BI-METAL HOLESAW	73mm
C 10.7.4.7.76	BI-METAL HOLESAW	76mm
10.7.4.7.79	BI-METAL HOLESAW	79mm
10.7.4.7.83	BI-METAL HOLESAW	83mm
10.7.4.7.89	BI-METAL HOLESAW	89mm
10.7.4.7.95	BI-METAL HOLESAW	95mm
10.7.4.7.102	BI-METAL HOLESAW	102mm
10.7.4.7.114	BI-METAL HOLESAW	114mm
10.7.4.7.127	BI-METAL HOLESAW	127mm
10.7.4.7.152	BI-METAL HOLESAW	152mm

General points when using hole saws

- Always make sure the workpiece is securely clamped, and select the correct speed for the diameter of hole saw being used and that of the material being cut.
- Always use the correct size arbor for the saw size selected, and make sure that arbors with drive pins have these fully engaged before use.
- Always use a lubricant when cutting steel and withdraw the hole saw from the cut at regular intervals to prevent clogging in deep holes.

HOLESAW ACCESSORIES

	STOCK NO	DESCRIPTION	ART NO.
D	A2	ARBOR FOR 14 - 30mm	10.7.4.7.1.1
E	A4	ARBOR FOR 32 - 152mm	10.7.4.7.1.2
F	HSS	PILOT DRILL	10.7.4.7.1.3